


Product Specifications

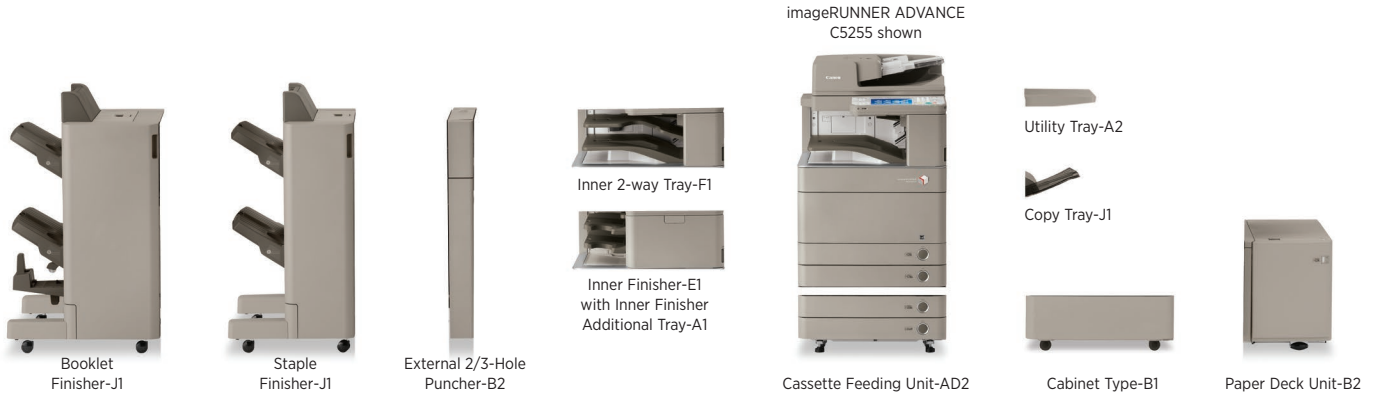

Main Unit

System Type

Color Digital Multifunction Imaging System

Functions

Standard: Copy, Print (UFR II), Scan, Send, Store
Optional: Print (PCL, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

Operation Panel

8.4" SVGA Full-Color TFT Screen

Memory

Standard: 2 GB RAM
Maximum: 2.5 GB RAM

Hard Disk Drive

Standard: 160 GB
Maximum: 1 TB

Mirroring Hard Disk Drive

Optional (160 GB, 1 TB), Method: RAID1

Network Interface Connection

Standard: 1000Base-T/100Base-TX/10Base-T
Optional: Wireless LAN (IEEE 802.1x via third-party adapter)

Other Interface

Standard: USB 2.0 (Host) x 2, USB 2.0 (Device)
Optional: Device Port [USB 2.0 (Host) x 2], Serial Interface, Copy Control Interface

Copy/Print Speed (BW/Color)

Letter: **C5255:** Up to 55/51 ppm
C5250: Up to 50/45 ppm
C5240A: Up to 40/35 ppm
C5235A: Up to 35/30 ppm
Legal/11" x 17": **C5255:** Up to 28/26 ppm
C5250: Up to 28/26 ppm
C5240A: Up to 20/18 ppm
C5235A: Up to 20/18 ppm

First-Copy-Out Time (Letter)

C5255/C5250: As fast as 3.9 Seconds (BW), 6.0 Seconds (Color)
C5240A/C5235A: As fast as 5.4 Seconds (BW), 8.1 Seconds (Color)

Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Paper Cassettes, 100-sheet Stack Bypass
Optional: Dual 550 Sheet Paper Cassettes, 2,700-sheet Paper Deck
Maximum: 5,000 Sheets

Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)
Maximum: 3,250 Sheets (w/Staple Finisher or Booklet Finisher)

Output Paper Sizes

Cassettes: 12" x 18",* 11" x 17",* Legal, Letter, Letter-R, Statement-R, Executive, Custom Size (5-1/2" x 7-1/8" to 12" x 18")
Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size (3-7/8" x 5-1/2" to 12-5/8" x 18")

Paper Deck: Letter

Other: Envelope Feeder Attachment (COM10 No.10,
Options: Monarch, DL, ISO-C5)**
Tab Feeding Attachment Kit**

Acceptable Paper Weights

Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Bypass: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)

Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Executive to 12" x 18")

Paper Weights: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Special Media Support

Thin, Plain 1 [17 lb. Bond to 21 lb. Bond (64 g/m² to 81 g/m²)], Plain 2 [22 lb. Bond to 28 lb. Bond (82 g/m² to 105 g/m²)], Recycled, Color, Pre-Punched, Bond, Heavy 1 [29 lb. Bond to 60 lb. Cover (106 g/m² to 163 g/m²)], Heavy 2 [61 lb. Cover to 80 lb. Cover (164 g/m² to 220 g/m²)], Heavy 3 [82 lb. Cover to 140 lb. Index (221 g/m² to 256 g/m²)], Tracing, Coated, Labels, Transparency, Tab, Letterhead, and Envelopes

Warm-up Time

C5255/C5250: From Power On: 31 Seconds, From Sleep: 18 Seconds
Quick Startup Mode: 7 Seconds***
C5240A/C5235A: From Power On: 31 Seconds, From Sleep: 15 Seconds
Quick Startup Mode: 7 Seconds***

Power Requirements/Plug

C5255/C5250: 120 V AC, 60 Hz, 20 A/NEMA 5-20P
C5240A/C5235A: 120 V AC, 60 Hz, 15 A/NEMA 5-15P

Power Consumption

Maximum: **C5255/C5250:** 1.8 kW
C5240A/C5235A: 1.5 kW
Sleep Mode: 0.8 W

Dimensions (H x W x D)

37-3/8" x 24-3/8" x 28-1/8"
(950 mm x 620 mm x 715 mm)

Installation Space (W x D)

33-1/2" x 28-1/8" (850 mm x 715 mm)

Weight

Approx. 346 lb. (157 kg)†

Toner (Estimated Yield @ 5% Coverage)

C5255/C5250: Black: 44,000 Images, Color (C,M,Y): 38,000 Images
C5240A/C5235A: Black: 36,000 Images, Color (C,M,Y): 27,000 Images

Main Unit (continued)

Image Reader Unit

Scan Resolution

Up to 600 x 600 dpi

Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional objects [up to 4.4 lb. (2 kg)]

Maximum Original Size

Up to 11" x 17"

Document Feeder

Scan Method

Single-Pass Duplexing, Automatic Document Feeder

Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R, Statement, or Statement-R

Paper Weights: 1-sided scanning: 11 lb. Bond to 58 lb. Cover (42 to 157 g/m²)

2-sided scanning: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²)

Scan Speed (BW/Color; Letter)

Simplex: Up to 75/75 ipm (300 dpi)/Up to 75/51 ipm (600 dpi)

Duplex: Up to 120/120 ipm (300 dpi)/Up to 75/51 ipm (600 dpi)

Paper Capacity (20 lb. Bond)

150 Sheets

Copy Specifications

Multiple Copies

1 to 999

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25% - 400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-Sided, Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet, Transparency Interleaving, Shift, Margin, Frame Erase, Image Combination, Different Size Original, Job Build, Job Done Notice, Scan Image Check, Mode Memory, Recall, Negative/Positive Inversion, Image Repeat, Mirror Image, Sharpness, Tab Paper Creation, Form Composition, Secure Watermark, Page Numbering, Copy Set Numbering, Watermark and Date, Job Block Combination, Store in User Inbox

Print Specifications

Processor

Canon Dual Custom Processor (Shared)

Memory

Standard: 2 GB RAM

Maximum: 2.5 GB RAM

Hard Disk Drive

Standard: 160 GB

Maximum: 1 TB

Engine Resolution

1200 x 1200 dpi

PDL Support

Standard: UFR II

Optional: PCL 5c, PCL 6, Adobe PS 3

Print Driver Supported OS

UFR II, PCL 5c/6, Adobe PS 3:
Windows* (Windows XP/Windows Vista*/Windows 7/Server 2003/Server 2008/Server 2008 R2/Windows 8/Server 2012/Small Business Server 2011), Windows Terminal Servers (Server 2003/Server 2008/Server 2008 R2/Server 2012), Small Business Server 2011, Windows Clustering Server (Windows Server 2003/Server 2008/Server 2008 R2/Server 2012), Citrix (Presentation Server 4.5, XenApp 5.0/6.0/6.5, XenDesktop 4.0/5.0/5.5/6), Macintosh* (OSX 10.5.8 or later, UFR II and PS 3 Only), VMware (vSphere 4/5/5.1), SAP (PS and PCL Only)

Direct Print Support

Standard: TIFF, JPEG

Optional: PDF, XPS^{††}, EPS^{†††}

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Black and White Printing, Objective, Color/Black-and-White Auto Detect, Toner Reduction, Poster Printing

Scan Specifications

Network TWAIN Scan

Standard

Network Scan Utility

Color Network ScanGear

Universal Send Specifications

Sending Method

E-Mail, I-Fax, File Server (FTP, SMB, WebDAV), Mail Box, Super G3 Fax (Optional)

Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black), Full Color, Grayscale, BW

Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100 dpi

Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-Touch Buttons)

Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV

E-mail/I-Fax: SMTP, POP3, I-FAX (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF (Apply Policy), PDF (Optimize for Web), PDF/XPS (OCR), PDF/A-1b, XPS, XPS (Compact), OOXML (OCR) (.pptx and .docx)

Optional: PDF (Trace & Smooth), PDF (Encrypted), PDF/XPS (Digital Signature), PDF (Reader Extensions)

I-Fax Data Format

Color: .tfx (JPEG)

BW: .tif (MH, MR, MMR)

Universal Send Features

Two-Sided Original, Different-size Originals, Original Type Selection, Book to Two Pages, Density Adjustment, Sharpness, Document Name, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, Sender's Name (TTI), E-Mail Priority

Fax Specifications

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

Statement to 11" x 17"

Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type Selection, Two-sided Original, Book to Two Pages

Main Unit (continued)

Store Specifications

Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox,
50 Confidential Fax Inboxes
6,000 Maximum Pages Stored

Advanced Box

Available Approx. 15 GB (Standard HDD)
Disk Space: Approx. 629 GB (1 TB HDD)
Communication Protocol: SMB or WebDAV
Supported Client PC: Windows® (Windows 2000/XP/Windows Vista®)
Concurrent Connections (Max.): SMB: 32, WebDAV: 12 (Active Sessions)
Advanced Box Features: Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB Memory
Optional: SD, SDHC, CompactFlash, Memory Stick, Microdrive

Security Specifications

Standard

Department ID Management, Single Sign On-H, Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Port Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Erase (Up to 3x), HDD Initialize (Up to 9x), HDD Lock, HDD Data Erase Scheduler, IPSec, Adobe LiveCycle Rights Management ES2.5 Integration

Optional

Removable HDD, HDD Encryption, HDD Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, Secure Watermark, IEEE 2600.1 Common Criteria Certification¹

Environmental Information

ENERGY STAR® Qualified

Rated EPEAT Silver

RoHS Compliant

Ecomark

Blue Angel

WEEE Directive

Optional Accessories

Paper Supply Options

Cassette Feeding Unit-AD2

Paper Capacity: 550 Sheets x 2 Cassettes [20 lb. Bond (80 g/m²)]
Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Acceptable Paper Size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Custom Size [5-1/2" x 7-1/8" to 12" x 18" (139.7 mm x 182 mm to 304.8 mm x 457.2 mm)]

Power Source/ Maximum Power Consumption: From the Main Unit/Approximately 30 W
Dimensions (H x W x D): 9-7/8" x 24-3/8" x 27-5/8" (251 mm x 620 mm x 700 mm)
Weight: Approximately 61.7 lb. (28 kg)

Paper Deck Unit-B2*

Paper Capacity: 2,700 Sheets [20 lb. Bond (80 g/m²)]
Number of Drawers: 1
Acceptable Paper Weight: 14 lb. Bond to 60 lb. Cover (52 to 163 g/m²)
Acceptable Paper Size: Letter

Power Source/ Maximum Power Consumption: From Main Unit/Approximately 45 W
Dimensions (H x W x D): 18-5/8" x 14-5/8" x 23-3/4" (473 mm x 372 mm x 603 mm)
Weight: Approximately 81.6 lb. (37 kg)

Envelope Feeder Attachment-D1**

Paper Capacity: 50 Sheets (or 30 mm in height)
Acceptable Paper Size: COM10 No.10, Monarch, DL, ISO-C5
Feeding Speed: 10 cpm
Dimensions (H x W x D): 3-1/4" x 17-1/4" x 12-1/8" (81 mm x 439 mm x 307 mm)
Weight: Approximately 2.6 lb. (1.2 kg)

Output Options

Inner 2-way Tray-F1*

Number of Trays: 2
Total Output Capacity: **Top Tray:** 250 Sheets (20 lb. Bond) **Lower Tray:** 100 Sheets (20 lb. Bond)
Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Acceptable Paper Size: 12" x 18", 12-5/8" x 17-11/16", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-9/16" to 12-5/8" x 18" (99 mm x 139.7 mm to 320 mm x 457.2 mm)], and Envelopes
Dimensions (H x W x D): 3" x 16-3/4" x 16" (76 mm x 427 mm x 407 mm)
Weight: Approximately 1.3 lb. (574 g)

Inner Finisher-E1*

Number of Trays: Up to 2 Trays (With Inner Finisher Additional Tray-A1)
Total Output Capacity: **Without Inner Finisher Additional Tray-A1:** 500 Sheets **With Inner Finisher Additional Tray-A1**
Top Tray: 100 Sheets (Letter) **Lower Tray:** 200 Sheets (Letter)
Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Acceptable Paper Size: 12" x 18", 12-5/8" x 17-11/16", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size (3-7/8" x 5-9/16" to 12-5/8" x 18"), and Envelopes
Staple Positions: **Corner Stapling** (11" x 17", Legal, Letter, Letter-R) **Double Stapling** (11" x 17", Legal, Letter, Letter-R)
Maximum Stapling Capacity: **Letter and Executive:** 50 Sheets (14 to 21 lb. Bond) 30 Sheets (22 to 28 lb. Bond) 2 Sheets (29 lb. Bond to 140 lb. Index) **11" x 17", Legal and Letter-R:** 30 Sheets (14 to 21 lb. Bond) 20 Sheets (22 to 28 lb. Bond) 2 Sheets (28 lb. Bond to 140 lb. Index)

Paper Capacity of Staple Mode: **Top Tray:** 3/8" in height **Lower Tray:** 30 Sets (or 2-1/2" in height)
Type of Staple: Staple-J1 (5,000 x 3)
Power Source/ Maximum Power Consumption: From the Main Unit/Approximately 40 W
Dimensions (H x W x D): 9-1/4" x 34-1/8" x 21-1/4" (234 mm x 865 mm x 540 mm (When the Auxiliary Tray is extended))
Weight: Approximately 28.7 lb. (13 kg)

Staple Finisher-J1*

Number of Trays: 2
Total Output Capacity: 3,000 Sheets (Letter, Statement-R, Executive) **Top Tray:** 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) **Lower Tray:** 1,700 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Acceptable Paper Type: Thin, Plain, Recycled, Color, Pre-Punched, Bond, Heavy, Tracing, Letterhead, Coated, Labels, Transparency, and Envelopes
Acceptable Paper Size: 12" x 18", 12-5/8" x 17-11/16", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-9/16" to 12-5/8" x 18" (99 mm x 139.7 mm to 320 mm x 457.2mm)], and Envelopes
Staple Positions: **Corner Stapling:** (11" x 17", Legal, Letter, Letter-R, Executive) **Double Stapling:** (11" x 17", Legal, Letter, Letter-R, Executive)

Optional Accessories (continued)

Output Options (continued)

Staple Finisher-J1* (continued)

Maximum **Letter and Executive:**
Stapling 50 Sheets (14 to 21 lb. Bond)
Capacity: 30 Sheets (22 to 28 lb. Bond)
2 Sheets (29 lb. Bond to 140 lb. Index)
11" x 17", **Legal and Letter-R:**
30 Sheets (14 to 21 lb. Bond)
20 Sheets (22 to 28 lb. Bond)
2 Sheets (29 lb. Bond to 140 lb. Index)

Paper **Top Tray:**
Capacity of 1,300 Sheets/30 Sets (Letter, Executive),
Staple Mode: 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Lower Tray:
1,700 Sheets/30 Sets (Letter, Executive),
650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Type of Staple: Staple-J1 (5,000 x 3)
Power Source/
Maximum Power
Consumption: From the Main Unit/Approximately 100 W
Dimensions 43-1/4" x 26-5/8" x 25-1/2"
(H x W x D): [1,097 mm x 677 mm x 646 mm
(When the Auxiliary Tray is extended)]
Weight: Approximately 101 lb. (46 kg)

Booklet Finisher-J1*

Number of
Trays: 2
Total Output
Capacity: **Top Tray:** 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
Lower Tray: 1,700 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)

Acceptable
Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Acceptable
Paper Type: Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Tracing, Labels, Bond, Transparency, Envelopes
Acceptable
Paper Size: 12" x 18", 12-5/8" x 17-11/16", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-9/16" to 12-5/8" x 18" (99 mm x 139.7 mm to 320 mm x 457.2 mm)], and Envelopes
Staple
Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive
Saddle-Stitch: 11" x 17", Legal, Letter-R

Booklet Finisher-J1* (continued)

Maximum **Letter and Executive:**
Stapling 50 Sheets (14 to 22 lb. Bond)
Capacity: 30 Sheets (22 to 28 lb. Bond)
2 Sheets (29 lb. Bond to 140 lb. Index)
11" x 17", **Legal and Letter-R:**
30 Sheets (14 to 21 lb. Bond)
20 Sheets (22 to 28 lb. Bond)
2 Sheets (29 lb. Bond to 140 lb. Index)

Paper **Top Tray:**
Capacity of 1,300 Sheets/30 Sets (Letter, Executive),
Staple Mode: 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Lower Tray:
1,700 Sheets/30 Sets (Letter, Executive),
650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Maximum
Saddle-Stitch 16 Sheets (14 to 20 lb. Bond)
Capacity: 10 Sheets (22 to 28 lb. Bond)

Paper Capacity
of Saddle-
Stitch Mode: 25 Booklets (5-sheet Booklets)
Type of Staple: Staple-J1 (5,000 x 3)
Staple Cartridge-D3 (2,000 x 3)

Power Source/
Maximum Power
Consumption: From the Main Unit/Approximately 123 W
Dimensions 43-1/4" x 31-1/8" x 25-1/2"
(H x W x D): [1097 mm x 789 mm x 646 mm
(When the Auxiliary Tray is extended)]
Weight: Approximately 165 lb. (75 kg)

External 2/3 Hole Puncher-B2

Acceptable
Punch
Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Acceptable
Punch
Paper Type: Thin, Plain, Heavy, Color, Recycled, Letterhead, Coated
Acceptable
Punch
Paper Size: 11" x 17", Legal, Letter, Letter-R
Punch Type: **2 Holes:** (Legal, Letter-R, Executive)
3 Holes: (11" x 17", Letter)

Distance
Between **2 Holes:** 2-3/4" (70 mm)
Punch Holes: **3 Holes:** 4-1/4" (108 mm)
Punch Waste **2 Holes:** 10,000 sheets (21 lb. Bond)
Tray Capacity: **3 Holes:** 3,000 sheets (21 lb. Bond)

Power Source: From the Main Unit
Dimensions 36x 4-1/4" x 24-1/4"
(H x W x D): (915 mm x 107 mm x 615 mm)
Weight: Approximately 15.9 lb. (7.2 kg)

Other Optional Accessories

- Cabinet Type-B1
- Utility Tray-A2
- USB Keyboard
- Universal Keyboard Stand-A1
- Key Switch Unit-A2
- Copy Card Reader-F1
- Convenience Stapler-B1
- Universal Send Advanced Feature Set-F1
- Super G3 FAX Board-AE2
- Super G3 2nd Line Fax Board-AE1
- Super G3 3rd/4th Line Fax Board-AE1
- Remote FAX Kit-A1
- Barcode Printing Kit-D1
- Web Access Software-H1
- USB Device Port-E3
- Multimedia Reader/Writer-A2
- Additional Memory Type D (512MB)
- 2.5 inch/160 GB HDD-G1
- 2.5 inch/1 TB HDD-H1
- Copy Control Interface Kit-A1
- iR-ADV Security Kit-C1 for IEEE 2600.1 Common Criteria Certification¹

* Not available on top cassette.
** Can be set to Cassette 2 only. Can not install Envelope Feeder Attachment and Tab Feeding Attachment at same time.
*** If "Quick Startup Settings for Main Power" is set to ON, it takes 7 seconds until the key operation on the touch panel display is available after turning on the main power.
† Includes consumables.
†† XPS cannot be printed directly from the Web Access software.
††† EPS can be printed directly only from Remote User Interface.
‡ Requires Cassette Feeding Unit-AD2. Cannot be installed with Cabinet Type-B1.
‡ The Inner 2-way Tray-F1, Inner Finisher-E1, Staple Finisher-J1, and Booklet Finisher-J1 cannot be installed at the same time.
‡ Specified configurations and settings need to be applied to the device in order to achieve and maintain IEEE 2600.1 Common Criteria Certification. Visit the product advisory page on www.usa.canon.com for certification status.
NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, MEAP, and the GENUINE logo is a registered trademark or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. imageWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2016 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

